

TEMPORARY TRAFFIC CONTROL TYPICAL APPLICATION

IMPORTANT:

THIS DRAWING SHALL BE USED IN COMBINATION WITH THE GENERAL NOTES AT THE BEGINNING OF STANDARDS NO. MD 104.00.

NOTES:


THIS TYPICAL ALSO APPLIES TO PVMS PLACEMENT ON OR ALONG A MEDIAN SHOULDER.

PVMS MESSAGES AND PLACEMENT OF THIS DEVICE SHALL BE APPROVED BY THE ASSISTANT DISTRICT ENGINEER-TRAFFIC.


PVMS SHALL BE PLACED A MINIMUM OF 6' AND NO MORE THAN 15' FROM EDGE LINE.

ON LONG TERM PROJECTS PVMS'S SHOULD BE INSTALLED BEHIND TRAFFIC BARRIER.

PVMS SHALL NOT BE PERMITTED TO STAND WITHIN 4' BEHIND THE FACE OF THE TRAFFIC BARRIER.

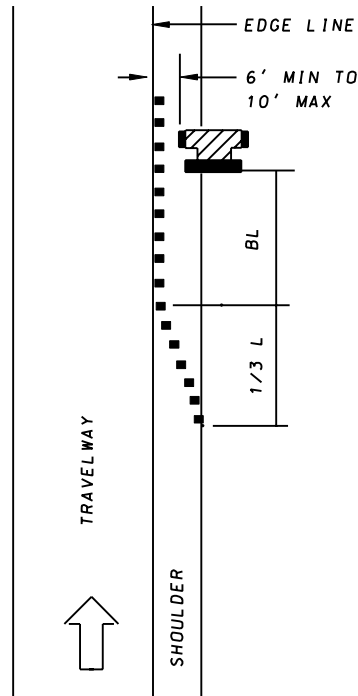

PVMS NEAR EDGE LINE
PLACEMENT

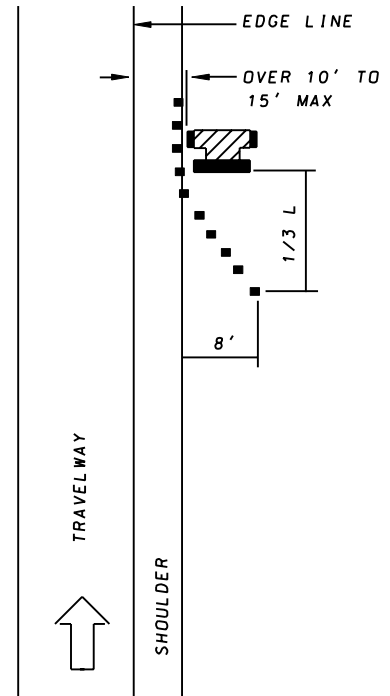

PVMS FAR EDGE LINE
PLACEMENT

KEY:

PORTABLE VARIABLE MESSAGE SIGN (PVMS)

CHANNELIZING DEVICES

DIRECTION OF TRAFFIC

SPECIFICATION
104

CATEGORY CODE ITEMS

APPROVED

DIRECTOR - OFFICE OF TRAFFIC AND SAFETY



APPROVAL • SHA REVISIONS
APPROVAL 9-10-96
REVISED 10-1-01
REVISED
REVISED

APPROVAL • FEDERAL HIGHWAY ADMINISTRATION
APPROVAL 9-27-96
REVISED
REVISED
REVISED

**Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION**

STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

**PORTABLE VARIABLE MESSAGE SIGN PLACEMENT
ALL ROADWAYS/ALL SPEEDS**

STANDARD NO.

MD 104.84